

LED and Light Reflective Scoreboards



Colorado Time Systems' numeric scoreboards are a cost-effective way to provide information, involve the audience and showcase the athletes for all aquatic sports. Modules can be used singly or combined in multiple-module scoreboard designs.


Whether you choose light-reflective or LED digits, your display will enhance your program and provide exceptional visibility. Designed specifically for the swimming pool environment, your scoreboard's high-quality construction resists corrosion in any environment, giving you years of trouble-free service.

Panels can be added to the numeric scoreboard for sponsor advertising or facility/team name.

Numeric scoreboards can be set to display information for swimming, diving, water polo, synchronized swimming, track and other sports. The scoreboard may also serve as a time-of-day clock and pace clock.

See reverse side for specifications.

Revised 04/10

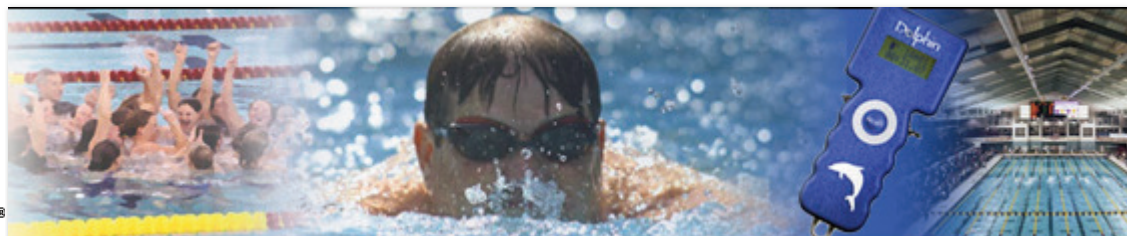

Scoreboard Specifications

LED Digits

Light Reflective Digits

General

Each one-line scoreboard module includes 8 seven-segment digits, 7 decimals, one colon and a non-glare weathershield. LED scoreboards are available with 8 or 10 digits.

Power

Power required is 110~125 or 220~240 VAC, 50/60 Hz.
Normal operating power is less than 1 amp per scoreboard module.

Each duplex receptacle is 125V Leviton #5352 or equivalent for country of installation. Receptacles must be in place before CTS installation. It is extremely important that the circuits used to power the scoreboard are not shared with other devices. The scoreboard is sensitive to "noise" on the AC Power line.

Digits

| | |
|--|--|
| 10.1" (25.7cm) high | 9" (22.9cm) high |
| Red, green, amber, or blue LEDs forming seven-segment digits | Fluorescent yellow, light-reflective, seven-segment digits |

Module Dimensions

| | |
|--------------------------|---------------------------|
| Height: 14" (35.6cm) | Height: 14" (35.6cm) |
| Width: 97.625" (248cm) | Width: 102" (259.1cm) |
| Depth: 4" (10.2cm) | Depth: 5.25" (13.3cm) |
| Weight: 45 lbs. (20.4kg) | Weight: 72 lbs. (32.7 kg) |

Mounting Options


Flexible mounting configurations are available for multiple-module designs. Modules may be configured vertically up to thirteen units and mounted in a corner or on a flat wall. Modules may also be configured side by side and flat wall mounted. Please specify when ordering.

Signage

Signage and sign holder panel(s) can be provided. Please inquire for details when ordering.

Data Cable

Specify length needed when ordering new system.
Standard lengths: 100 feet, 150 feet, 200 feet.

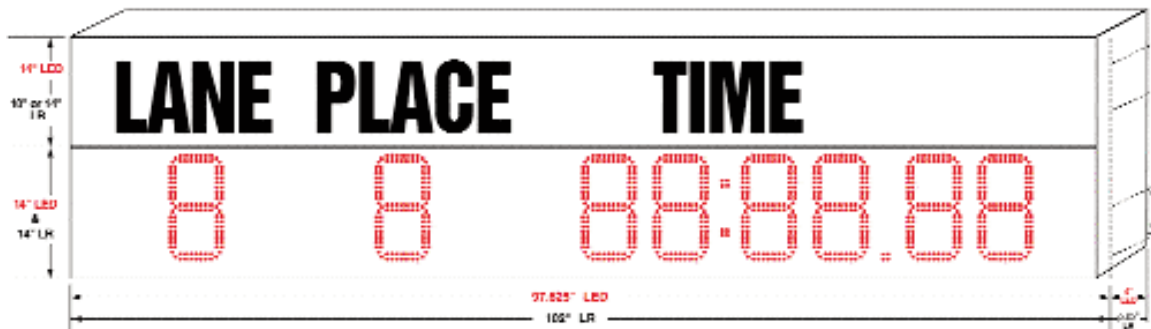

Revised 04/10

